



NexiLite



- Latest generation LED light source
- Conform to European standard EN60598-2-22
- 100, 150 and 250lm output flux
- 1h e 3h duration
- Completa recharge in 12h for 1h models
- Compact dimensions: 290x110x40mm

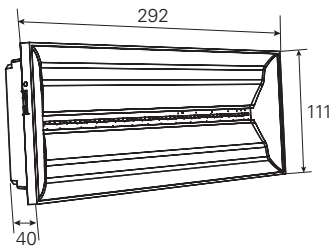

Dimensions in mm - IP40 indoor applications

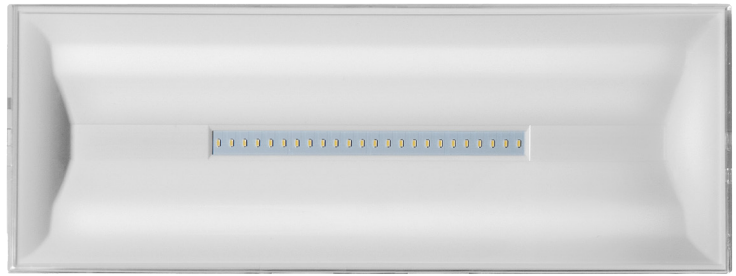

NexiLite is the new LED emergency lighting luminaire from Eaton. Thanks to the latest generation LED light source NexiLite is able to provide an high output flux up to 250lm. With his compact and modern design, NexiLite can be used in any architectural context, the wide range of accessories allows installation on a wall, ceiling, surface or recessed in indoor and outdoor environments, thanks to IP65 protection kit. The quality of the raw materials, the high technology of the electronic circuitry, together with the latest generation light sources put make it unique for performance and reliability. NexiLite is available in non maintained NM and maintained M mode with 1 or 3 hours duration.

Part number	Description	Function	Duration (h)	Flux NM	Flux M	Lamp (LED)	Battery NiCd HT	Rest mode	Pcs per box
STD - Self contained									
NXL100	NEXILITE 100LM 1H NM	NM	1	100	-	12 LED	3,6V-0,8Ah	Yes	10
NXL150	NEXILITE 150LM 1H NM	NM	1	150	-	12 LED	3,6V-0,8Ah	Yes	10
NXL250	NEXILITE 250LM 1H NM	NM	1	250	-	24 LED	3,6V-1,7Ah	Yes	10
NXL150-3H	NEXILITE 150LM 3H M	M/NM	3	150	60	16 LED	3,6V-2,0Ah	Yes	10
NXL250-3H	NEXILITE 250LM 3H M	M/NM	3	250	60	48 LED	7,2V-1,7Ah	Yes	10

Double side signalization panel

NEXI-PEXLD	DOUBLE SIDE PANEL 30M DOWN/DOWN ISO
NEXI-PEXLR	DOUBLE SIDE PANEL 30M L/R ISO
NEXI-PEXLD	DOUBLE SIDE PANEL 30M DOWN/BLIND ISO



NexiLite with double side panel

Trasforms NexiLite into a double side exit sign with 30m viewing distance

Single side pictograms

NEXI-PICTO-D	SINGLE SIDE PICTOGRAM DOWN
NEXI-PICTO-L	SINGLE SIDE PICTOGRAM LEFT
NEXI-PICTO-R	SINGLE SIDE PICTOGRAM RIGHT
NEXI-PICTO-U	SINGLE SIDE PICTOGRAM UP



NexiLite with single side pictogram

Trasforms NexiLite into a single side exit sign with 20m viewing distance

Accessories

NEXI-IP	KIT IP65
NEXI-RB	RECESSED BASE FOR BRICK WALLS
NEXI-FC	FALSE CEILING KIT
LUM10312	TLU - RESTMODE AND TEST TELECOMMAND



NexiLite with IP65 protection kit

Allows to use NexiLite in outdoor applications. The IP65 KIT is compatible with all models. Dimensions: 308 x 125 x 53 mm